
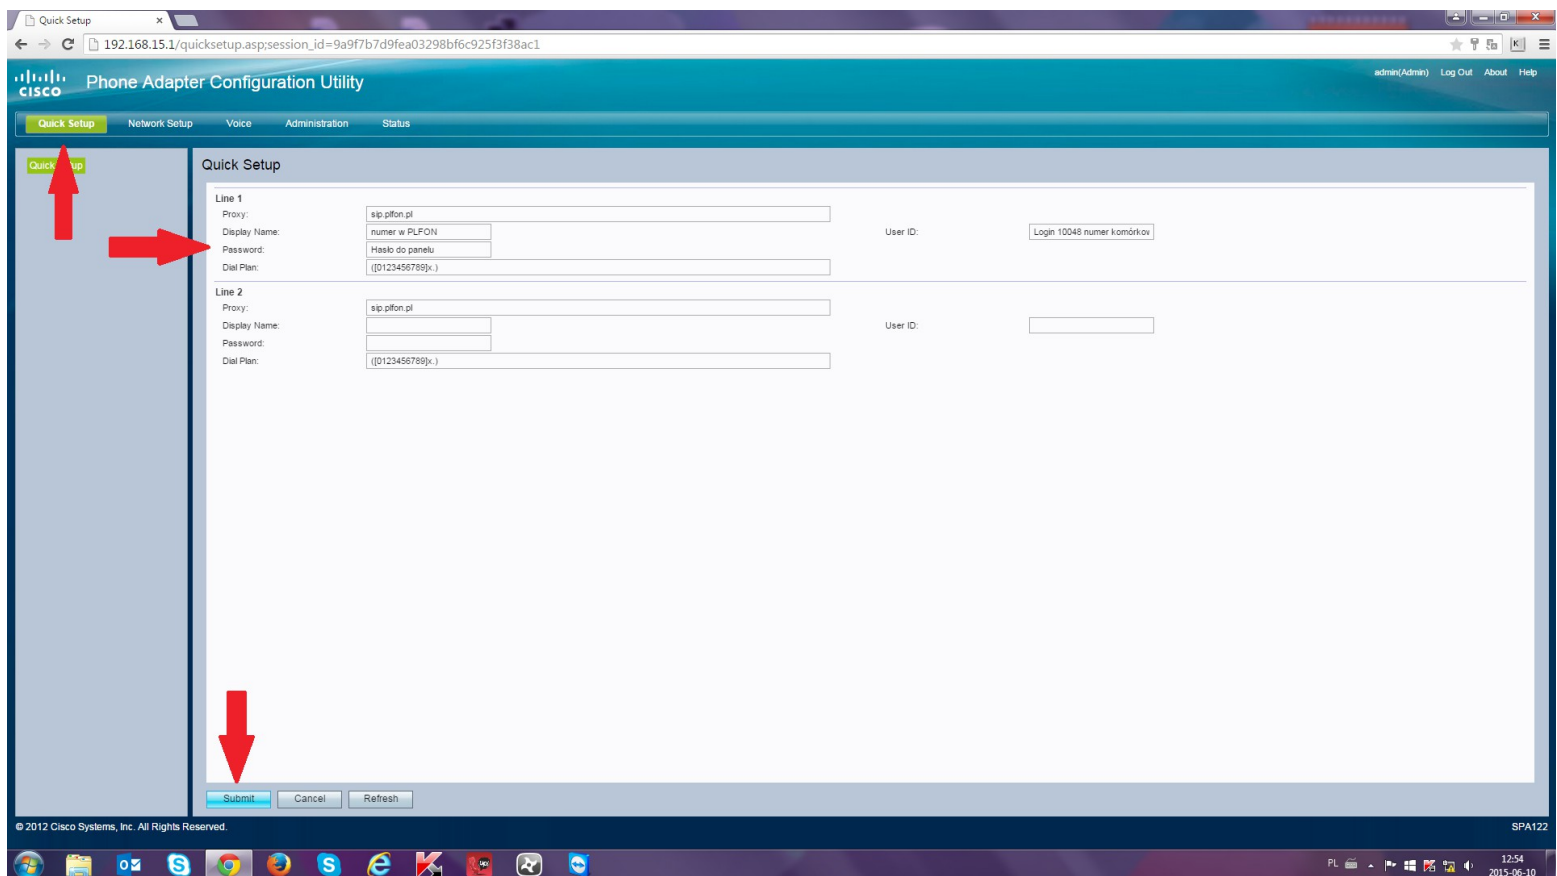


Proszę o podłączenie urządzenia bezpośrednio do komputera za pomocą gniazda ETHERNET znajdującego się z tyłu bramki, po podłączeniu należy otworzyć przeglądarkę internetową i w pasku adresu proszę wpisać 192.168.15.1 i nacisnąć Enter  
login/hasło: admin, Poniżej konfiguracja:

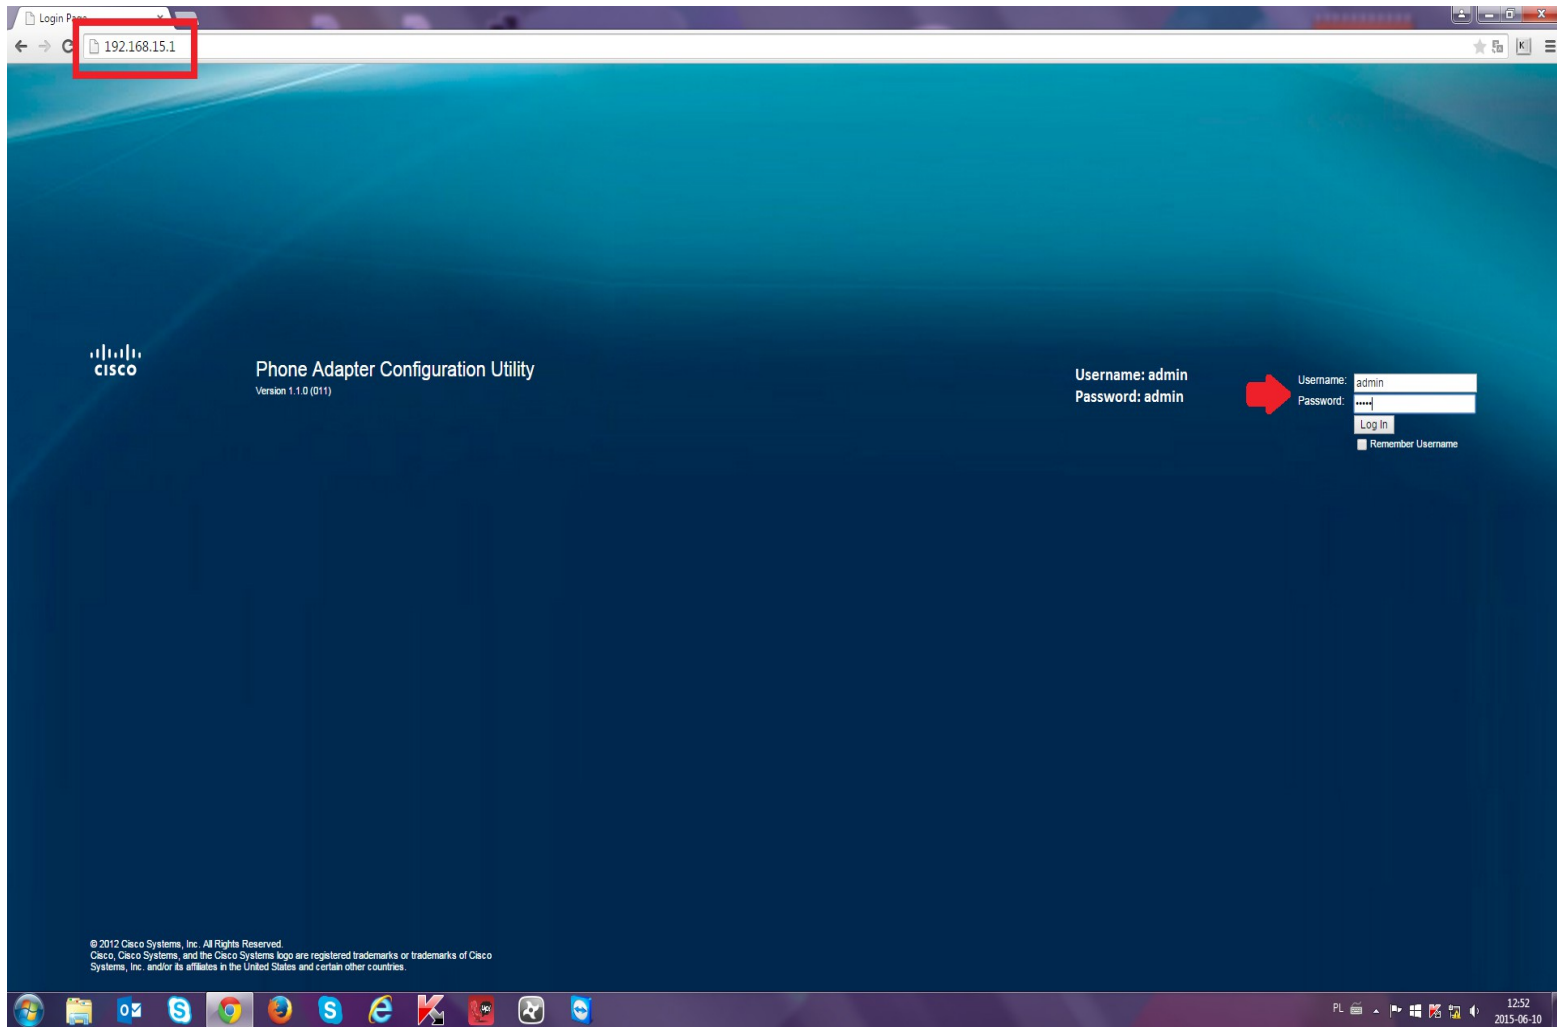

Phone Adapter Configuration Utility

Quick Setup Network Setup **Voice** Status

Information System SIP **Provisioning** Regional Line 1 Line 2 User 1 User 2

**Provisioning**

Configuration Profile

Provision Enable: **no**

Resync Random Delay: 2

Resync At Random Delay: 6000

Resync Error Retry Delay: 360

Resync From SIP: **yes**

Resync Trigger 1:

Resync Trigger 2:

Resync Falls On FNF: **yes**

Profile Rule: https://provisioning.peoplefone.com/cisco/pspaSPN.cfg

Profile Rule B:

Profile Rule C:

Profile Rule D:

Profile Name:

Log Resync Request Msg: SPN SMAC -- Requesting resync \$\$SCHEME://SERVIP:SPORT\$SPATH

Log Resync Success Msg: SPN SMAC -- Successful resync \$\$SCHEME://SERVIP:SPORT\$SPATH

Log Resync Failure Msg: SPN SMAC -- Resync failed: \$ERR

Report Rule:

Firmware Upgrade

Upgrade Enable: **yes**

Upgrade Error Retry Delay: 3600

Upgrade Rule: https://provisioning.peoplefone.com/firmware/SPA1xx\_1.1\_Q\_011.bin

Log Upgrade Request Msg: SPN SMAC -- Requesting upgrade \$\$SCHEME://SERVIP:SPORT\$SPATH

Log Upgrade Success Msg: SPN SMAC -- Successful upgrade \$\$SCHEME://SERVIP:SPORT\$SPATH -- \$ERR

Log Upgrade Failure Msg: SPN SMAC -- Upgrade failed: \$ERR

License Keys:

General Purpose Parameters

GPP A:

GPP B:

GPP C:

GPP D:

GPP E:

GPP F:

Resync On Reset: **yes**

Resync At (H:Min):

Resync Periodic: 36000

Forced Resync Delay: 144000

Resync After Upgrade Attempt: **yes**

Profile Region:

Downgrade Rev Limit:

Submit Cancel Refresh

© 2012 Cisco Systems, Inc. All Rights Reserved. SPA122

Dodatkowe ustawienia bramki pod fax:

473 309 604 - TeamViewer - Licencja bezpłatna (tylko do użytku niekomercyjnego)

192.168.15.1/voice.aspx?session\_id=44417455850a716419665a73b093a03

Phone Adapter Configuration Utility

Quick Setup Network Setup **Voice** Administration Status

Information System SIP Provisioning Regional **Line 1** Line 2 User 1 User 2

**Line 1**

General

Line Enable: **yes**

Streaming Audio Server (SAS)

SAS Enable: **no**

SAS Inbound RTP Sink:

SAS DLG Refresh Intv: 30

NAT Settings

NAT Mapping Enable: **no**

NAT Keep Alive Msg: \$NOTIFY

EXT SIP Port:

NAT Keep Alive Enable: **no**

NAT Keep Alive Dest: \$PROXY

Network Settings

SIP ToS/DiffServ Value: 0xb8

RTP ToS/DiffServ Value: 0xb8

Network Jitter Level: **very high**

SIP CoS Value: 3 [0-7]

RTP CoS Value: 6 [0-7]

Jitter Buffer Adjustment: **no**

SIP Settings

SIP Transport: **UDP**

SIP 100REL Enable: **no**

Auth Resync-Reboot: **yes**

SIP Remote-Party-ID: **yes**

SIP Debug Option: none

Restrict Source IP: **no**

Refer Target Bye Delay: 0

Refer-To Target Contact: **no**

Auth INVITE: **no**

Use Anonymous With RPD: **yes**

SIP Port: 5060

EXT SIP Port:

SIP Proxy-Require:

SIP GUID: **no**

RTP Log Intv: 0

Referor Bye Delay: 4

Reference Bye Delay: 0

Sticky 183: **no**

Reply 182 On Call Waiting: **no**

Use Local Addr In FROM: **no**

Call Feature Settings

Blind Attn-Xfer Enable: **no**

Xfer When Hangup Conf: **yes**

Conference Bridge Ports: 3

MOH Server:

Conference Bridge URL:

Enable IP Dialing: **no**

Submit Cancel Refresh

© 2011 Cisco Systems, Inc. All Rights Reserved. SPA122

473 309 604 - TeamViewer - Licencja bezpłatna (tylko do użytku niekomercyjnego)

Edycja Widok Historia Zakładki Narzędzia Pomoż

Onet - informacje, rozrywka, emocje Quick Setup Nowa karta

192.168.15.1/voice.aspx?session\_id=44417455850a716419965a73b0f93a03

Bank Pekao SA mBank BZWBK iBiznes24 iPKO eBGŻ Firma AliorSync BiznesLink NBP ECOD Bankier.pl NBPSP VIES GUS GUS SP MZ FirstData Kalkulatory Gofin Druki Wolters E-MS-Portal Financial Web Supplier... polecamBank Payleven

### Cisco Phone Adapter Configuration Utility

admin(Admin) Log Out About Help

Quick Setup Network Setup Voice Administration Status

Information System SIP Provisioning Regional **Line 1** Line 2 User 1 User 2

#### Line 1

Accept Last Serv:	yes	DND Serv:	yes
CID Serv:	yes	CWCD Serv:	yes
Call Return Serv:	yes	Call Redial Serv:	yes
Call Back Serv:	yes	Three Way Call Serv:	yes
Three Way Conf Serv:	yes	Att Transfer Serv:	yes
Unattn Transfer Serv:	yes	MWI Serv:	yes
MWI Serv:	yes	Speed Dial Serv:	yes
Secure Call Serv:	yes	Referral Serv:	yes
Feature Dial Serv:	yes	Service Announcement Serv:	no

#### Audio Configuration

Preferred Codec:	G711a	Second Preferred Codec:	Unspecified
Third Preferred Codec:	Unspecified	Use Pref Codec Only:	yes
G729a Enable:	yes	Silence Supp Enable:	no
G729-32 Enable:	yes	Silence Threshold:	medium
FAX V21 Detect Enable:	yes	Echo Canc Enable:	no
FAX CNG Detect Enable:	yes	FAX Passthru Codec:	G711a
FAX Codec Symmetric:	yes	DTMF Process INFO:	yes
FAX Passthru Method:	ReNVITE	DTMF Process AVT:	yes
FAX Process NSE:	yes	DTMF Tx Method:	Auto
FAX Disable ECAIN:	yes	DTMF Tx Mode:	Strict
DTMF Tx Strict Hold Off Time:	70	FAX Enable T38:	yes
Hook Flash Tx Method:	None	FAX T38 Redundancy:	2
FAX T38 ECM Enable:	yes	FAX Tone Detect Mode:	caller or callee
Symmetric RTP:	no		

#### Dial Plan

Dial Plan: (\*0[1469]11[000]([2-9])00000(1000[2-9]00000[5])0000000000)

#### FXS Port Polarity Configuration

Idle Polarity:	Forward	Caller Conn Polarity:	Forward
Callee Conn Polarity:	Forward		

Submit Cancel Refresh

© 2011 Cisco Systems, Inc. All Rights Reserved. SPA122

POL 16:10  
PLP 2013-09-20